



## SH-702N

▶ AC Type ◀

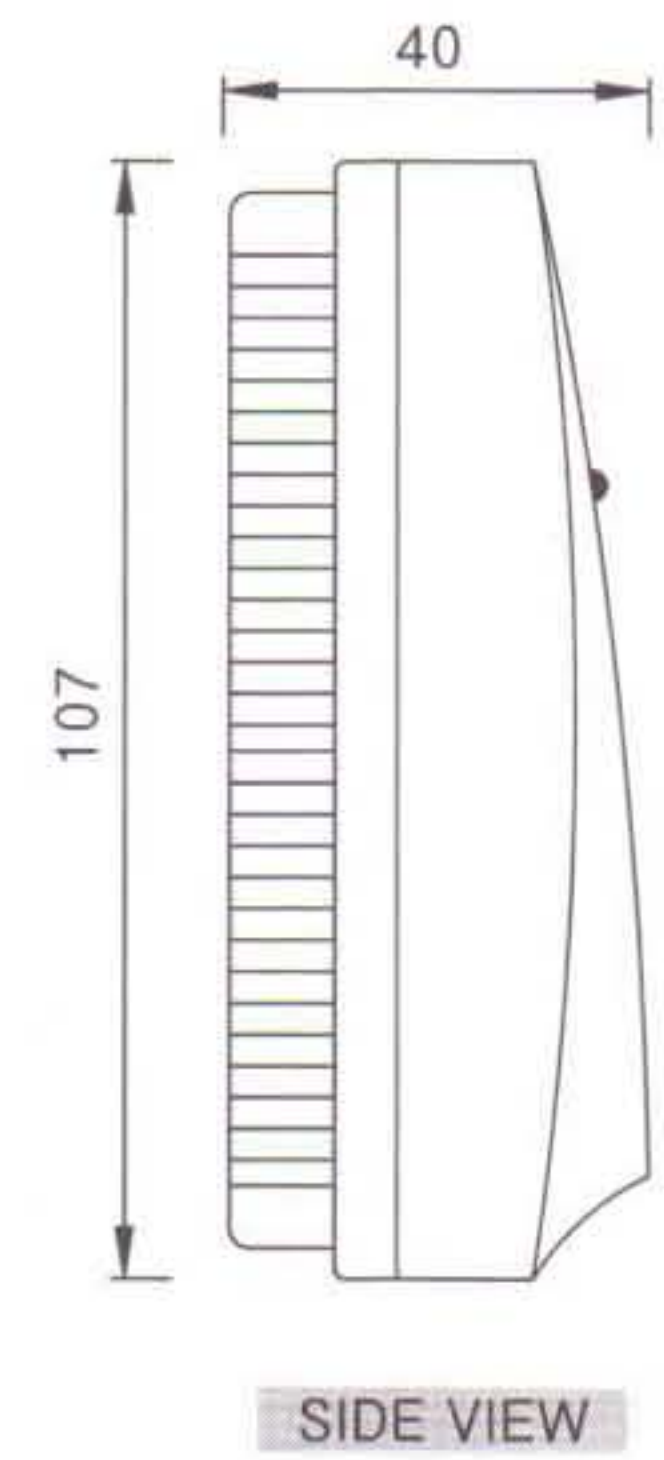

- Applications
  - Home, Apartment, etc
- Features
  - Small & Light
  - Easy Calibration
  - Usability Function
  - Innovation Design

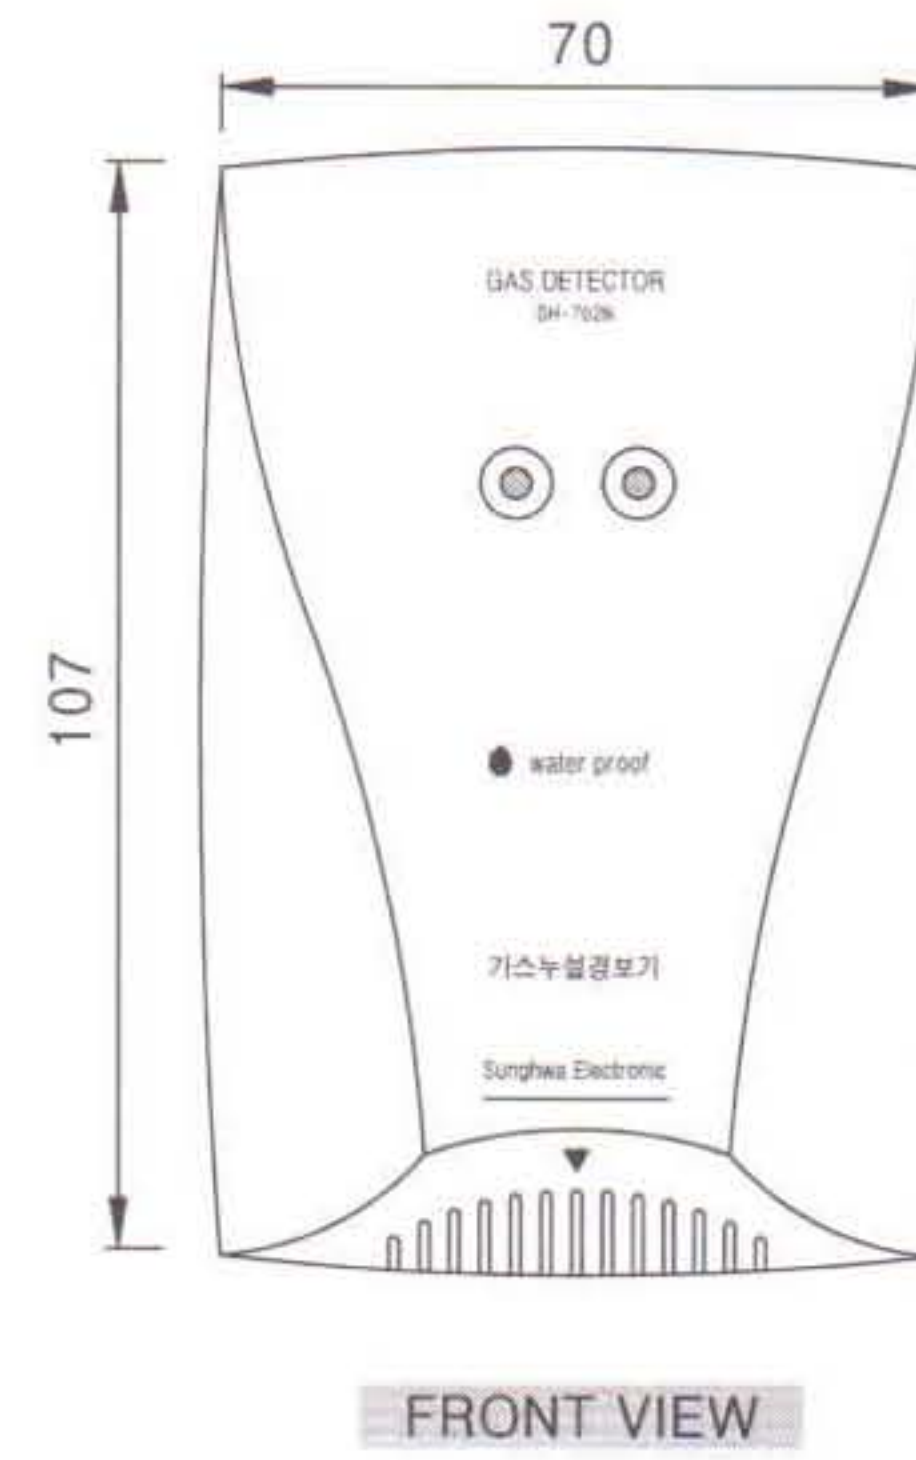



General Specification	
Detectable Gases	Flammable, LPG, LNG
Measuring Range	0 ~ 100% LEL
Measuring Method	Diffusion Type
Alarm Setting	20% LEL
Alarm Density	LPG (0.06 ~ 0.45% LEL), LNG (0.06 ~ 1.25% LEL)
Alarm Method	Buzzer Sound - Automatic Reset Alarm Display - LED yellow Flickering
Output Signal	DC 12V (Red - plus, Black - minus)
Power Consumption	Normal - 2w, Alarm - 2.1w
Alarm Sound	Over 70dB
Fuse	0.3A (300mA)
Operating Temp'/Humi'	-20°C ~ +40°C / below 85%
Weight	0.3Kg
Power	AC 220V, 50/60Hz

## SH-103N

▶ DC Type ◀



- Applications
  - Home, Apartment, etc
- Features
  - Small & Light
  - Easy Calibration
  - Usability Function
  - Innovation Design

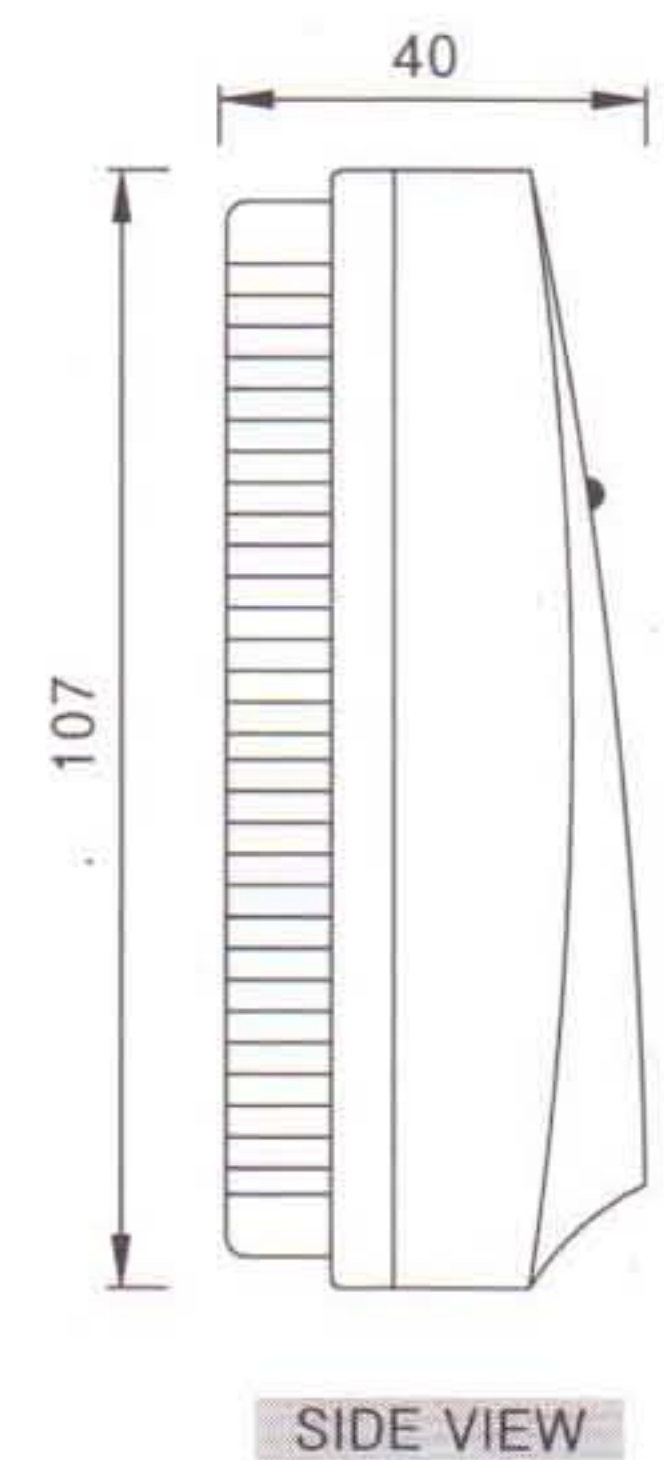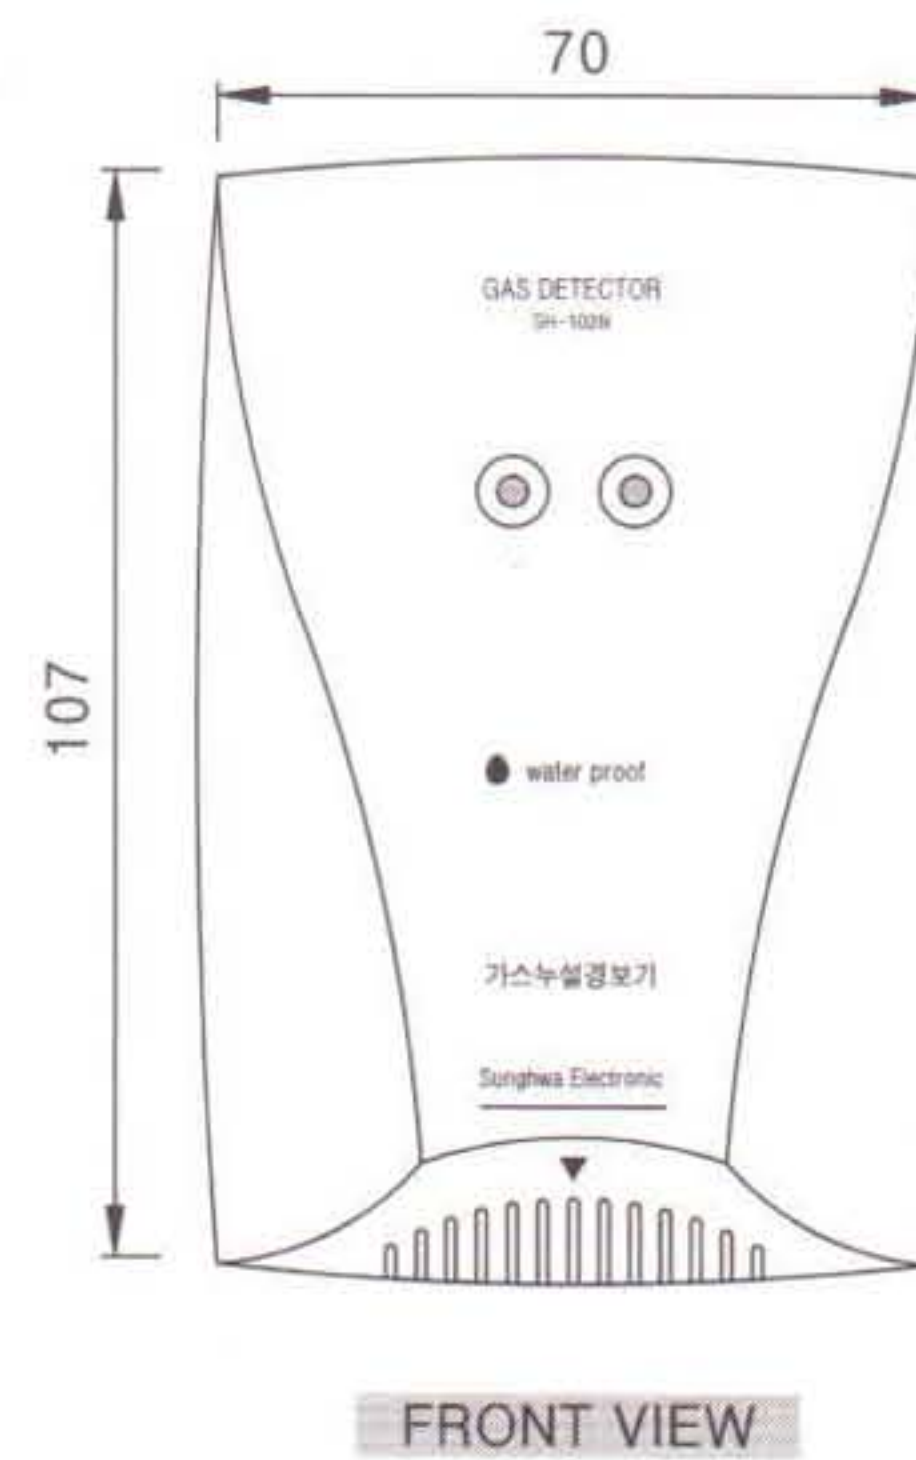

General Specification	
Detectable Gases	Flammable, LPG, LNG
Measuring Range	0 ~ 100% LEL
Measuring Method	Diffusion Type
Alarm Setting	20% LEL
Alarm Density	LPG (0.06 ~ 0.45% LEL), LNG (0.06 ~ 1.25% LEL)
Alarm Method	Buzzer Sound - Automatic Reset Alarm Display - LED yellow Flickering
Output Signal	DC 12V (White - plus, Black - minus)
Power Consumption	Normal - 2w, Alarm - 2.1w
Alarm Sound	Over 70dB
Fuse	0.3A (300mA)
Operating Temp'/Humi'	-20°C ~ +40°C / below 85%
Weight	0.3Kg
Power	DC 12V-18V (Red - plus, Black - minus)